

The All-New Ranger

Whether it's a truck for hard work or a holiday off the beaten track, or both, the extensive and versatile selection of models means there's a Ranger that's just right for your needs.

4x2 MODELS



XL Single Cab Chassis
2.5L Petrol Manual



XL Single Cab Chassis
2.2L Diesel Manual



XL Single Cab Chassis Hi-Rider
2.2L Diesel Manual (Auto Option)



XL Single Cab Pick-up
2.2L Diesel Manual



XL Super Cab Chassis Hi-Rider
2.2L Diesel Auto



XL Double Cab Chassis Hi-Rider
2.2L Diesel Auto



XL Double Cab Pick-up
2.5L Petrol Manual



XL Double Cab Pick-up Hi-Rider
2.2 Diesel Manual (Auto Option)



XLT Super Cab Pick-up Hi-Rider
3.2L Diesel Auto



XLT Double Cab Pick-up Hi-Rider
3.2 Diesel Manual (Auto Option)

4x4 MODELS



XL Single Cab Chassis
2.2L Diesel Manual



XL Single Cab Chassis
3.2L Diesel Manual (Auto Option)



XL Super Cab Chassis
3.2L Diesel Manual



XL Super Cab Pick-up
3.2L Diesel Manual



XL Double Cab Chassis
2.2L Diesel Manual (Auto Option)



XL Double Cab Pick-up
2.2L Diesel Manual (Auto Option)



XL Double Cab Pick-up
3.2L Diesel Manual (Auto Option)



XLT Super Cab Pick-up
3.2 Diesel Manual (Auto Option)




XLT Double Cab Pick-up
3.2L Diesel Manual (Auto Option)




Wildtrak Double Cab Pick-up
3.2 Diesel Manual (Auto Option)

HI-RIDER HEIGHT

4x2 XL Double Cab Pick-up

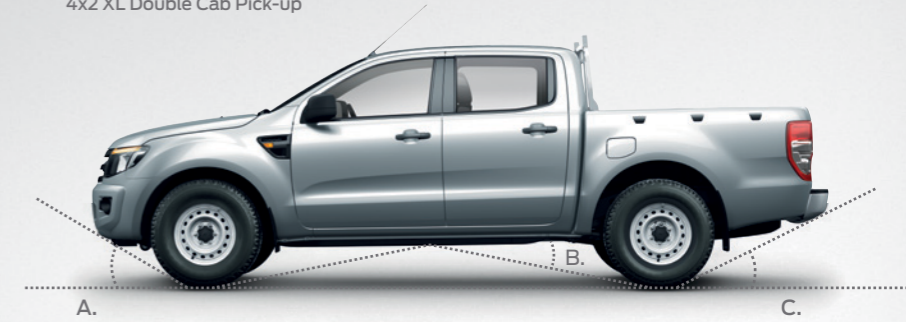

4x2 XL Double Cab Pick-up Hi-Rider

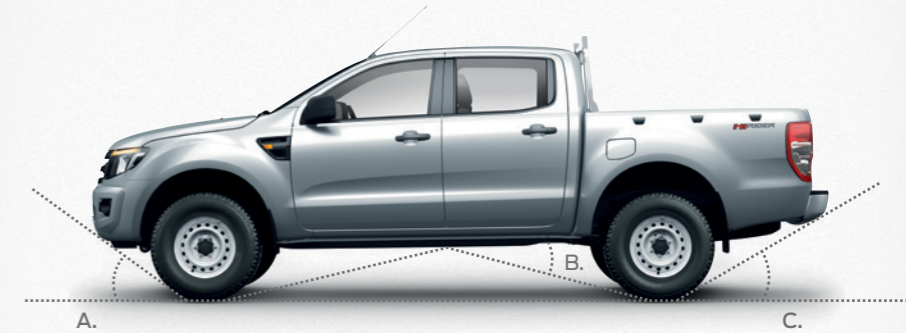

With additional ground clearance as well as increased approach and departure angles, the Ranger Hi-Rider model handles tough terrain with ease.

	4x2 XL Double Cab Pick-up	4x2 XL Double Cab Pick-up Hi-Rider
A. Approach angle (degrees)	22	28
B. Ramp breakover angle (degrees)	17	24
C. Departure angle (degrees)*	22	27
Ground Clearance (mm)	201	232

*Departure angle is measured to rear bumper on XL Pick-up models.

4X2 SPECIFICATIONS AND OPTIONS

MODEL NAME	XL Single	XL Single	XL Single	XL Single	XL Super	XLT Super	XL Double	XL Double	XL Double	XLT Double
	C/C 2.5 Petrol	C/C 2.2 Diesel	C/C HR 2.2 Diesel	P/U 2.2 Diesel	C/C HR 2.2 Diesel	P/U HR 3.2 Diesel	P/U 2.5 Petrol	C/C HR 2.2 Diesel	P/U HR 2.2 Diesel	P/U HR 3.2 Diesel
FACTORY FITTED OPTIONS										
Bench Seat, no A/C, no Side Curtain Airbags	S	-	-	-	-	-	-	-	-	-
Bench Seat with A/C, no Side Curtain Airbags	O	S	-	-	-	-	-	-	-	-
Bench Seat with A/C, with Side Curtain Airbags	O	O	-	-	-	-	-	-	-	-
Bucket Seat with A/C, no Seat Side or Side Curtain Airbags	O	O	-	-	-	-	-	-	-	-
Bucket Seat with A/C, Seat Side and Side Curtain Airbags	O	O	S	S	S	S	S	S	S	S
Automatic Transmission	-	-	O	-	S	S	-	S	O ⁴	O
Locking Rear Differential (LRD)	-	-	O	-	-	S ³	-	-	O ⁵	S
Rear Differential - Open	S	S	S	S	S	-	S	S	S	-
OPTIONAL TRAY										
Aluminium tray (Standard)	O	O	O	-	O	-	-	-	-	-
Aluminium tray (Hi-Series)	O	O	O	-	O	-	-	-	-	-
VEHICLE MASSES⁶										
GVM (kg)	2925	2925	3200	2925	3200	3200	2925	3200	3200	3200
Kerb Weight (kg):	1486	1619	1672	1789	1759	2001	1789	1821	1929	2052
Payload (kg)	1439	1306	1528	1136	1441	1199	1136	1379	1271	1148
Front Axle Load (Maximum) (kg)	1325	1325	1480	1325	1480	1480	1325	1480	1480	1480
Rear Axle Load (Maximum) (kg)	1755	1755	1850	1755	1850	1850	1755	1850	1850	1850
Gross Combined Mass Incl. Braked trailer (kg)	5125	5425	5950	5425	5950	5950	5125	5950	5950	5950
EXTERIOR DIMENSIONS (mm)										
Overall height	1703	1703	1800	1703	1804	1810	1716	1815	1815	1821
Overall width	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850
Overall length	5110	5110	5110	5359	5110	5351	5359	5110	5359	5351
Front overhang	905	905	905	905	905	905	905	905	905	905
Rear overhang	985	985	985	1234	985	1226	1234	985	1234	1226
Front track, Rear track	1590	1590	1560	1590	1560	1560	1590	1560	1560	1560
Wheelbase	3220	3220	3220	3220	3220	3220	3220	3220	3220	3220
Ground Clearance (Unladen) mm	201	201	232	201	232	237	201	232	232	237
Wading Depth (mm)	600	600	800	600	800	800	600	800	800	800
Approach Angle (Unladen, Degrees)	22	22	28	22	28	29	22	28	28	29
Departure Angle (Unladen, Degrees) Measured to:										
a) Rear Bumper on XL Pick-up models,	24	24	28	22	28	20	22	28	27	20
b) Spare Tyre on XL Cab Chassis models,										
c) Towbar on XLT and Wildtrak models										
Ramp Breakover angle (Degrees)	17	17	24	17	24	25	17	24	24	25
Turning Circle	12.0	12.0	12.7	12.0	12.7	12.7	12.0	12.7	12.7	12.7
PICK-UP BOX DIMENSIONS (mm)										
Length - at floor	-	-	-	2317	-	1847	1549	-	1549	1549
Length - top of box	-	-	-	2253	-	1783	1485	-	1485	1485
Width - pick-up box	-	-	-	1560	-	1560	1560	-	1560	1560
Width - between wheelhouses	-	-	-	1139	-	1139	1139	-	1139	1139
Height - at centreline of axle	-	-	-	511	-	511	511	-	511	511
Width of rear opening	-	-	-	1330	-	1330	1330	-	1330	1330
Height - floor height to ground	-	-	-	723	-	840	723	-	835	840
INTERIOR DIMENSIONS (mm)										
Front Headroom	1024	1024	1024	1024	1024	1024	1022	1022	1022	1022
Front Legroom	1058	1058	1058	1058	1058	1058	1058	1058	1058	1058
Front Shoulder Room	1440	1440	1440	1440	1440	1440	1440	1440	1440	1440
2nd Row Headroom	-	-	-	-	938	938	986	986	986	986
2nd Row Legroom	-	-	-	-	796	796	902	902	902	902
2nd Row Shoulder Room	-	-	-	-	1400	1400	1430	1430	1430	1430
INTERIOR CLIMATE CONTROL										
Air Conditioning	O	S	S	S	S	-	S	S	S	-
Dual Zone Climate Control	-	-	-	-	-	S	-	-	-	S
AUDIO AND COMMUNICATION										
Bluetooth® with Voice Control ⁷	S	S	S	S	S	S	S	S	S	S
In Car Entertainment pack 1 (Standard on XL): AM/FM Stereo Radio · Single MP3 compatible CD Player · Integrated Audio Module · 4.2" Multi-function colour display High Audio Integrated Control Panel · AUX · USB/iPod integration · 2 Speakers · 2 Tweeters										
In Car Entertainment pack 2 (Standard on XLT): Same features as per Pack 1 plus 2 additional Speakers										

S = Standard. A = Accessory that can be added at any time. P = Part of pack. - = Not available.

3. Automatic transmission only. 4. LRD Not available. 5. Manual transmission only. 6. Optional features additional weights: 4x2 automatic transmission=14kg. 4x4 automatic transmission=18kg. Additional weight of Locking Rear Differential (LRD)=24kg. Additional weight of Bucket vs bench seat=5kg. Air-conditioning=24kg. Additional weight of optional Airbags: a) Side curtain for bench seat=2kg. b) Combined seat side airbags and side curtain airbag for bucket seat=5kg. Payload (Maximum) is defined as Gross Vehicle Mass (GVM) minus the kerb mass. Payload is the maximum combined value of occupants, cargo, added options, added structures and towball download (when towing). Kerb Mass includes the vehicle with a full tank of fuel, without occupants, luggage or cargo and with all standard equipment. Additional weight of optional features must be taken into account when calculating kerb weight and payload. GVM must not be exceeded. Front and rear individual axle load limits must not be individually exceeded. The combined weight of the fully loaded vehicle and trailer must not exceed the GCM.

MODEL NAME	XL Single	XL Single	XL Single	XL Single	XL Super	XLT Super	XL Double	XL Double	XL Double	XLT Double
	C/C 2.5 Petrol	C/C 2.2 Diesel	C/C HR 2.2 Diesel	P/U 2.2 Diesel	C/C HR 2.2 Diesel	P/U HR 3.2 Diesel	P/U 2.5 Petrol	C/C HR 2.2 Diesel	P/U HR 2.2 Diesel	P/U HR 3.2 Diesel
INTERIOR										
Long Centre Console - double lid with 2 cupholders & coin storage	P ⁸	P ⁸	S	S	S	S	S	S	S	S
Cooled Console	-	-	-	-	-	S	-	-	-	S
2 child seat upper anchorage points	-	-	-	-	S	S	S	S	S	S
Floor Coverings - Vinyl	S	S	S	S	S	-	S	S	S	-
Floor Coverings - Carpet	-	-	-	-	-	S	-	-	-	S
Front Floor Mats - Driver Only	-	-	-	-	-	S	-	-	-	S
Cruise Control with Steering Wheel Mounted buttons	S	S	S	S	S	S	S	S	S	S
2nd powerpoint	S	S	S	S	S	S	S	S	S	S
3rd powerpoint rear of console	-	-	-	-	-	S	-	-	-	S
Day/Night Inside Rear View Mirror	S	S	S	S	S	-	S	S	S	-
Electrochromatic Rear View Mirror	-	-	-	-	-	S	-	-	-	S
Power Rear Windows	-	-	-	-	-	-	S	S	S	S
Power Front Windows (Auto Driver)	S	S	S	S	S	S	S	S	S	S
Rear Window Defrost	-	-	-	-	S	S	S	S	S	S
Privacy Glass	-	-	-	-	-	S	-	-	-	S
Rain Sensing Windscreen Wipers	-	-	-	-	-	S	-	-	-	S
Front seat - Bench seat - 60/40	S	S	-	-	-	-	-	-	-	-
2 way manual adjustment (Bench seat)	S	S	-	-	-	-	-	-	-	-
Front seat - 2 Separate bucket seats - driver & passenger	O	O	S	S	S	S	S	S	S	S
4 way manual driver seat adjustment with lumbar support	P ⁸	P ⁸	S	S	S	S	S	S	S	S
EXTERIOR										
Tow Bar	-	-	-	-	-	S	-	-	-	S
Grille and Door Handle - Black	S	S	S	S	S	-	S	S	S	-
Grille and Door Handle - Chrome	-	-	-	-	-	S	-	-	-	S
Side Steps - Tubular Chrome	-	-	-	-	-	S	-	-	-	S
Tailgate Handle - Black	-	-	-	S	-	-	S	-	S	-
Tailgate Handle - Chrome	-	-	-	-	-	S	-	-	-	S
Tailgate lock manual	-	-	-	S	-	S	S	-	S	S
Front and Rear Mud Flaps ⁹	S	S	S	S	S	S	S	S	S	S
Chrome Tubular Sports Bar with High Mounted Stop Lamp	-	-	-	-	-	S	-	-	-	S
Auto Headlamps	S	S	S	S	S	S	S	S	S	S
Foglights	-	-	-	-	-	S	-	-	-	S
Roof Mounted Centre High Mounted Stop Light	-	-	-	S	-	-	S	-	S	-
Body Mounted Indicators	S	S	S	S	S	-	S	S	S	-
Front Bumper - Body Colour	S	S	S	S	S	S	S	S	S	S
Rear Bumper - Body Colour (excluding rear bumper sensor device)	-	-	-	S	-	-	S	-	S	-
Rear Bumper - Chrome Steel	-	-	-	-	-	S	-	-	-	S
Power adjustable exterior mirrors	S	S	S	S	S	-	S	S	S	-
Exterior Mirrors with: Power Adjustable, Power Folding, Heated, Turn Indicator	-	-	-	-	-	S	-	-	-	S
EXTERIOR BODY AND BOX ELEMENTS										
Inner Tie Downs	-	-	-	S	-	S	S	-	S	S
Outer Tie Downs and Load Rest	-	-	-	S	-	-	S	-	S	-
Bedliner and 12V socket on bedliner	-	-	-	-	-	-	-	-	-	S
SAFETY AND SECURITY										
Remote Keyless Entry	S	S	S	S	S	S	S	S	S	S
Rear Parking Sensors	-	-	-	-	-	S	-	-	-	S
Volumetric Alarm	-	S	S	S	S	S	-	S	S	S
Driver and Front Passenger Airbag	S	S	S	S	S	S	S	S	S	S
Front seat side airbags	O ¹⁰	O ¹⁰	S	S	S	S	S	S	S	S
Side Curtain Airbag	O	O	S	S	S	S	S	S	S	S
Beltminder - Driver only	S	S	-	-	-	-	-	-	-	-
Beltminder - Driver and front passenger	O ¹¹	O ¹¹	S	S	S	S	S	S	S	S
Dynamic Stability Control (DSC) Incorporating ABS · Hill Launch Assist · Trailer Sway Control · Load Adaptive Control · Electronic Brake Assist · Roll Over Mitigation Emergency Brake Light · Centrally Mounted Parking Brake (Standard across all 4x2 models)										

S = Standard. A = Accessory that can be added at any time. P = Part of pack. - = Not available.

7. Bluetooth® is a registered trademark of Bluetooth SIG Inc., and is used under licence. Customers should consult their Ford Dealer on the ability of their mobile phone handset to integrate with the Bluetooth® system prior to making a purchase decision. 8. Mandatory with Bucket Seats. 9. Rear mud flaps on pick-up models only. 10. Bucket Seats only. 11. With Bucket Seats, Seat side airbags and Side Curtain airbags only.

4X4 SPECIFICATIONS AND OPTIONS

MODEL NAME	XL Single	XL Single	XL Super	XL Super	XLT Super	XL Double	XL Double	XL Double	XLT Double	Wildtrak
	C/C	C/C	C/C	P/U	P/U	C/C	P/U	P/U	P/U	Double P/U
	2.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel	2.2 Diesel	2.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel
FACTORY FITTED OPTIONS										
Bench Seat with A/C, with Side Curtain Airbags	S	S	–	–	–	–	–	–	–	–
Bucket Seat with A/C, Seat Side and Side Curtain Airbags	O	O	S	S	S	S	S	S	S	S
Automatic Transmission	–	O ¹²	–	–	O	O	O	O ¹²	O	O
Locking Rear Differential (LRD)	O	O ¹³	–	–	S	–	–	O ¹³	S	S
Rear Differential - Open	S	S	S	S	–	S	S	S	–	–
OPTIONAL TRAY										
Aluminium tray (Standard)	O	O	O	–	–	–	–	–	–	–
Aluminium tray (Hi-Series)	O	O	O	–	–	–	–	–	–	–
VEHICLE MASSES¹⁴										
GVM (kg)	3200	3200	3200	3200	3200	3200	3200	3200	3200	3200
Kerb Weight (kg):	1762	1795	1870	2018	2095	1909	2034	2068	2159	2200
Payload (kg)	1438	1405	1330	1182	1105	1291	1166	1132	1041	1000
Front Axle Load (Maximum) (kg)	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480
Rear Axle Load (Maximum) (kg)	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850
Gross Combined Mass Incl. Braked trailer (kg)	5950	5950	5950	5950	5950	5950	5950	5950	5950	5950
EXTERIOR DIMENSIONS (mm)										
Overall height	1800	1800	1804	1804	1810	1815	1815	1815	1821	1848
Overall width	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850
Overall length	5110	5110	5110	5359	5351	5110	5359	5359	5351	5351
Front overhang	905	905	905	905	905	905	905	905	905	905
Rear overhang	985	985	985	1234	1226	985	1234	1234	1226	1226
Front track, rear track	1560	1560	1560	1560	1560	1560	1560	1560	1560	1560
Wheelbase	3220	3220	3220	3220	3220	3220	3220	3220	3220	3220
Ground Clearance (Unladen) mm	232	232	232	232	237	232	232	232	237	237
Wading Depth (mm)	800	800	800	800	800	800	800	800	800	800
Approach Angle (Unladen, Degrees)	28	28	28	28	29	28	28	28	29	29
Departure Angle (Unladen, Degrees) Measured to:										
a) Rear Bumper on XL Pick-up models,	28	28	28	27	20	28	27	27	20	20
b) Spare Tyre on XL Cab Chassis models,										
c) Towbar on XLT and Wildtrak models										
Ramp Breakover angle (Degrees)	24	24	24	24	25	24	24	24	25	25
Turning Circle	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7
PICK-UP BOX DIMENSIONS (mm)										
Length - at floor	–	–	–	1847	1549	–	1549	1549	1549	1549
Length - top of box	–	–	–	1783	1485	–	1485	1485	1485	1485
Width - pick-up box	–	–	–	1560	1560	–	1560	1560	1560	1560
Width - between wheelhouses	–	–	–	1139	1139	–	1139	1139	1139	1139
Height - at centreline of axle	–	–	–	511	511	–	511	511	511	511
Width of rear opening	–	–	–	1330	1330	–	1330	–	1330	1330
Height - floor height to ground	–	–	–	835	840	–	835	835	840	840
INTERIOR DIMENSIONS (mm)										
Front Headroom	1024	1024	1024	1024	1024	1022	1022	1022	1022	1022
Front Legroom	1058	1058	1058	1058	1058	1058	1058	1058	1058	1058
Front Shoulder Room	1440	1440	1440	1440	1440	1440	1440	1440	1440	1440
2nd Row Headroom	–	–	938	938	938	986	986	986	986	986
2nd Row Legroom	–	–	796	796	796	902	902	902	902	902
2nd Row Shoulder Room	–	–	1400	1400	1400	1430	1430	1430	1430	1430
INTERIOR CLIMATE CONTROL										
Air Conditioning	S	S	S	S	–	S	S	S	–	–
Dual Zone Climate Control	–	–	–	–	S	–	–	–	S	S
AUDIO AND COMMUNICATION										
Bluetooth® with Voice Control ¹⁷	S	S	S	S	S	S	S	S	S	S
In Car Entertainment pack 1 (Standard on all XL models): AM/FM Stereo Radio · Single MP3 compatible CD Player · Integrated Audio Module · 4.2" Multi-function colour display High Audio Integrated Control Panel · AUX · USB/iPod integration · 2 Speakers · 2 Tweeters										
In Car Entertainment pack 2 (Standard on XLT models): Same features as per Pack 1 plus 2 additional Speakers										
In Car Entertainment pack 3 (Standard on Wildtrak models): Same features as per Pack 2 plus a larger 5" Multi-function colour display and Satellite Navigation										
INTERIOR										
Long Centre Console - double lid with 2 cupholders & coin storage	P ⁸	P ⁸	S	S	S	S	S	S	S	S
Cooled Console	–	–	–	–	S	–	–	–	S	S
2 Child seat upper anchorage points	–	–	S	S	S	S	S	S	S	S
Floor Coverings - Vinyl	S	S	S	S	–	S	S	S	–	–

S = Standard. A = Accessory that can be added at any time. P = Part of pack. – = Not available.

12. LRD Not available. 13. Manual Transmission only. 14. Optional features additional weights: 4x2 automatic transmission=14kg, 4x4 automatic transmission=18kg. Additional weight of Locking Rear Differential (LRD)=24kg. Additional weight of Bucket vs bench seat=5kg. Air-conditioning=24kg. Additional weight of optional Airbags: a) Side curtain for bench seat=2kg, b) Combined seat side airbags and side curtain airbag for bucket seat=5kg. Weight of Wildtrak Roller Shutter (CHBAN)=35kg (indicative weight, subject to change). Payload (Maximum) is defined as Gross Vehicle Mass (GVM) minus the kerb mass. Payload is the maximum combined value of occupants, cargo, added options, added structures and towball download (when towing). Kerb Mass includes the vehicle with a full tank of fuel, without occupants, luggage or cargo and with all standard equipment. Additional weight of optional features must be taken into account when calculating kerb weight and payload. GVM must not be exceeded. Front and rear individual axle load limits must not be individually exceeded. The combined weight of the fully loaded vehicle and trailer must not exceed the GCM.

MODEL NAME	XL Single	XL Single	XL Super	XL Super	XLT Super	XL Double	XL Double	XL Double	XLT Double	Wildtrak
	C/C	C/C	C/C	P/U	P/U	C/C	P/U	P/U	P/U	Double P/U
	2.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel	2.2 Diesel	2.2 Diesel	3.2 Diesel	3.2 Diesel	3.2 Diesel
INTERIOR (Continued)										
Floor Coverings - Carpet	–	–	–	–	S	–	–	–	S	S
Front Floor Mats - Driver Only	–	–	–	–	S	–	–	–	S	–
Front and Rear Floor Mats - Wildtrak	–	–	–	–	–	–	–	–	–	S
Cruise Control with Steering Wheel Mounted buttons	S	S	S	S	S	S	S	S	S	S
2nd powerpoint	S	S	S	S	S	S	S	S	S	S
3rd powerpoint rear of console	–	–	–	–	S	–	–	–	S	S
Front seat - Bench seat - 60/40	S	S	–	–	–	–	–	–	–	–
2 way manual adjustment (Bench seat)	S	S	–	–	–	–	–	–	–	–
Front Seat - 2 Separate Bucket Seats - driver & passenger	O	O	S	S	S	S	S	S	S	S
4 way manual driver seat adjustment with lumbar support	P ¹⁵	P ¹⁵	S	S	S	S	S	S	S	–
8 way power driver seat adjustment with lumbar support	–	–	–	–	–	–	–	–	–	S
Heated front seats	–	–	–	–	–	–	–	–	–	S
Day/Night Inside Rear View Mirror	S	S	S	S	–	S	S	S	–	–
Electrochromatic Rear View Mirror	–	–	–	–	S	–	–	–	S	S
Power Rear Windows	–	–	–	–	–	S	S	S	S	S
Power Front Windows (Auto Driver)	S	S	S	S	S	S	S	S	S	S
Rear Window Defrost	–	–	S	S	S	S	S	S	S	S
Privacy Glass	–	–	–	–	S	–	–	–	S	S
Rain Sensing Windscreen Wipers	–	–	–	–	S	–	–	–	S	S
EXTERIOR										
Tow Bar	–	–	–	–	S	–	–	–	S	S
Fuel Tank Guard	S	S	S	S	S	S	S	S	S	S
Grille and Door Handle - Black	S	S	S	S	–	S	S	S	–	–
Grille and Door Handle - Chrome	–	–	–	–	S	–	–	–	S	–
Radiator Grille - Wildtrak	–	–	–	–	–	–	–	–	–	S
Side Steps - Tubular Chrome	–	–	–	–	S	–	–	–	S	S
Tailgate Handle - Black	–	–	–	S	–	–	S	S	–	S
Tailgate Handle - Chrome	–	–	–	–	S	–	–	–	S	–
Tailgate lock manual	–	–	–	S	S	–	S	S	S	S
Front and Rear Mud Flaps ¹⁶	S	S	S	S	S	S	S	S	S	S
Chrome Tubular Sports Bar with High Mounted Stop Lamp	–	–	–	–	S	–	–	–	S	–
Wildtrak Sports Bar and Roof Rails	–	–	–	–	–	–	–	–	–	S
Auto Headlamps	S	S	S	S	S	S	S	S	S	S
Foglights	–	–	–	–	S	–	–	–	S	S
Roof Mounted Centre High Mounted Stop Light	–	–	–	S	–	–	S	S	–	–
Body Mounted Indicators	S	S	S	S	–	S	S	S	–	–
Front Bumper - Body Colour	S	S	S	S	S	S	S	S	S	S
Rear Bumper - Body Colour ¹⁷	–	–	–	S	–	–	S	S	–	–
Rear Bumper - Accent Steel	–	–	–	–	–	–	–	–	–	S
Rear Bumper - Chrome Steel	–	–	–	–	S	–	–	–	S	–
Power adjustable exterior mirrors	S	S	S	S	–	S	S	S	–	–
Exterior Mirrors with: Power Adjustable, Power Folding, Heated, Turn Indicator, Puddle Lamps	–	–	–	–	S ¹⁸	–	–	–	S ¹⁸	S
EXTERIOR BODY AND BOX ELEMENTS										
Inner Tie Downs	–	–	–	S	S	–	S	S	S	S
Outer Tie Downs	–	–	–	S	–	–	S	S	–	–
Load Rest	–	–	–	S	–	–	S	S	–	–
Bedliner and 12V socket on bedliner	–	–	–	–	–	–	–	–	S	S
SAFETY AND SECURITY										
Remote Keyless Entry	S	S	S	S	S	S	S	S	S	S
Rear Parking Sensors	–	–	–	–	S	–	–	–	S	S
Rear View Camera	–	–	–	–	–	–	–	–	–	S
Volumetric Alarm	S	S	S	S	S	S	S	S	S	S
Driver and Front Passenger Airbag	S	S	S	S	S	S	S	S	S	S
Front seat side airbags	O ¹⁹	O ¹⁹	S	S	S	S	S	S	S	S
Side Curtain Airbag	O	O	S	S	S	S	S	S	S	S
Beltminder - Driver only	S	S	–	–	–	–	–	–	–	–
Beltminder - Driver and front passenger	O ²⁰	O ²⁰	S	S	S	S	S	S	S	S
Dynamic Stability Control (DSC) incorporating ABS · Hill Launch Assist · Trailer Sway Control · Load Adaptive Control · Electronic Brake Assist · Roll Over Mitigation Emergency Brake Light (Standard across all 4x4 models)										
Parking Brake - Handbrake for bench seat mounted centrally, same as dual front seat. (Standard across all 4x4 models)										

S = Standard. A = Accessory that can be added at any time. P = Part of pack. – = Not available.

15. Mandatory with Bucket Seats. 16. Rear mud flaps on pick-up models only. 17. Rear bumper body colour, excludes rear bumper sensor device. 18. Puddle lamps not available on XLT models. 19. Bucket Seats only. 20. With Bucket Seats, Seat side airbags and Side Curtain airbags only.

MECHANICAL SPECIFICATIONS

ENGINE	2.5L Petrol	2.2L Diesel	3.2L Diesel		
Engine type	4 Cylinder	4 Cylinder	5 Cylinder		
Engine size (cm ³)	2488.5	2198	3198		
Compression ratio	9.7:1	15.7:1	15.7:1		
Maximum power	122kW @ 6000rpm	110kW @ 3700rpm	147kW @ 3000rpm		
Maximum torque	226Nm @ 4500rpm	375Nm @ 1500-2500rpm	470Nm @ 1500-2750rpm		
No. of valves	16	16	20		
Bore x stroke	89 x 100mm	86 x 94.6mm	89.9 x 100.76mm		
Fuel management system	Sequential multi-port fuel injection	Turbocharged direct commonrail injection	Turbocharged direct commonrail injection		
TRANSMISSION RATIOS	5-speed manual	6-speed manual	6-speed auto	6-speed manual	6-speed auto
1st	4.200	5.441	4.171	5.441	4.171
2nd	2.238	2.839	2.342	2.839	2.342
3rd	1.366	1.721	1.521	1.721	1.521
4th	1.000	1.223	1.143	1.223	1.143
5th	0.763	1.000	0.867	1.000	0.867
6th	–	0.794	0.691	0.794	0.691
Reverse	3.84	4.935	3.400	4.935	3.400
FINAL DRIVE RATIOS					
4x2 Low Rider	4.7	3.31	–	–	–
4x2 High Rider	–	3.55	3.73	3.55	3.73
4x4	–	3.55	3.73	3.55	3.73
FUEL TANK CAPACITY (L)	80	80	80		

FUEL CONSUMPTION ¹ - 4X2		2.5L Petrol		2.2L Diesel	
Transmission		Manual no Air Conditioning, Cab Chassis Standard tray only		Manual with Air Conditioning	
Model		XL		XL	
Single	Fuel economy (L/100km)	9.8	10.4	7.6	
	CO ₂ Emissions (g/km)	235	250	203	
Double	Fuel economy (L/100km)	–	10.6	–	
	CO ₂ Emissions (g/km)	–	254	–	

FUEL CONSUMPTION ¹ - 4x2 HI-RIDER		2.2L Diesel		3.2L Diesel	
Transmission		Manual		Auto	
Model		XL		XLT	
Single	Fuel economy (L/100km)	7.6	8.9	–	–
	CO ₂ Emissions (g/km)	203	238	–	–
Super	Fuel economy (L/100km)	–	8.9	–	8.9
	CO ₂ Emissions (g/km)	–	238	–	239
Double	Fuel economy (L/100km)	7.6	8.9	8.4	8.9
	CO ₂ Emissions (g/km)	203	238	222	239

FUEL CONSUMPTION ¹ - 4X4		2.2L Diesel		3.2L Diesel					
Transmission		Manual		Manual		Auto			
Model		XL		XLT		Wildtrak		Wildtrak	
Single	Fuel economy (L/100km)	8.1	–	8.9	–	–	9.2	–	–
	CO ₂ Emissions (g/km)	216	–	235	–	–	246	–	–
Super	Fuel economy (L/100km)	–	–	8.9	8.9	–	–	9.2	–
	CO ₂ Emissions (g/km)	–	–	235	235	–	–	246	–
Double	Fuel economy (L/100km)	8.1	9.4	8.9	9.4	9.4	9.2	9.2	9.6
	CO ₂ Emissions (g/km)	216	251	235	248	248	246	246	256

MAXIMUM BRAKED TOWING CAPACITY²: (Maximum Unbraked towing capacity is 750kg for all models)

Engine	2.5L Petrol	2.2L Diesel			3.2L Diesel	
Transmission	5-speed manual	6-speed manual		6-speed auto	6-speed manual	6-speed auto
4x2	2200	2500	–	–	–	–
4x2 High Rider	–	–	3350	3350	3350	3350
4x4	–	–	3350	3350	3350	3350

MAXIMUM GROSS COMBINATION MASS

Engine	2.5L Petrol	2.2L Diesel			3.2L Diesel	
Transmission	5-speed manual	6-speed manual		6-speed auto	6-speed manual	6-speed auto
4x2	5125	5425	–	–	–	–
4x2 High Rider	–	–	5950	5950	5950	5950
4x4	–	–	5950	5950	5950	5950

1. Fuel consumption and emissions as per Australian Design Rule 81/02 (combined cycle). Note that the actual fuel consumption will depend on many factors including the driver's driving habits, prevailing conditions and the vehicle's equipment, condition and use. 2. Braked towing capacity subject to State and Territory Regulations. The weight of the vehicle must not exceed the Gross Vehicle Mass (GVM). The combined weight of the fully loaded vehicle and trailer must not exceed the Gross Combination Mass (GCM). Maximum individual axle loads must not be exceeded. Towball downforce must be taken into account when calculating payload and GCM. Towball download must be a minimum of 6% of the towed weight. Towball download must not exceed 10% of the towed weight. Towball download must not exceed 220kg on 2.5L petrol 4x2 Low Rider vehicles (2,200kg max. towing capacity). Towball download must not exceed 250kg on 2.2L Diesel 4x2 Low Rider vehicles (2,500kg max. towing capacity). Towball download must not exceed 335kg on 2.2L Diesel and 3.2L Diesel vehicles 4x2 Hi-Rider and 4x4 (3,350kg max. towing capacity).